

# CRUSSIS

## Installation instructions for kick scooters - series CROSS



Step 1.

Make sure that carton is not damaged



Step 2.

Remove the kick scooter out of the box



Step 3.

Remove the tape holding front and rear wheel



Step 4.

Remove the protecting material from frame



Step 5.

Remove the protecting material from handlebars




Step 6.

Put wheels aside



Step 7.

Loosen the screws on the stem and align so that it faces forward while riding

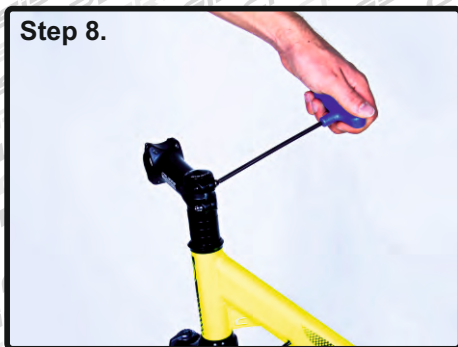

Step 8.

In this step set the direction of the stem roughly. You will align it precisely later with the wheel on



Step 9.

Tighten the screws on the stem with force 4 NM



Step 10.

Remove the screws from the front part of the stem



Step 11.

Attach the handlebars



Step 12.

Put back the front part of the stem and lightly tighten, adjust the angle of the handlebar and screw it with 4 NM



**Step 13.**  
Remove the plastic stopper from between the brake pads. **ATTENTION! DO NOT PRESS BRAKE LEVER UNTIL YOU PUT THE WHEEL BACK ON!**



**Step 14.**  
Put from wheel back on, tighten quick release. Mind the direction of the wheel



**Step 15.**  
Correct position of the quick release axle to the fork after tightening



**Step 16.**  
Stem and front wheel must form a single axis. Make sure that stem is properly tightened with force 4 NM



**Step 17.**  
Check the slope of the handlebars so it will suit the angle of the brake levers. We recommend setting at 45 degrees



**Step 18.**  
We wish you many happy kilometers on your new kick scooter CRUSSI!

